

## SP-2210AS-H/ZD

### 多织带自动缝纫机

Multi lace loop stitching solution



#### 性能优势

与传统缝制相比，具有线迹美观，无需熟练操作工用工成本低。自动送料，自动折边，通过热切或冷切工艺自动切料，自动缝纫及自动收料。缝制范围及织带宽可根据客户需求定制。

#### 效率

织带宽度:8~12mm

织带长度:14~22mm

针距长度: 0.05~12.7mm

#### 适用范围

应用于各种鞋类的加工，一次性可车缝1~6个织带。

#### Advantages

Compared with traditional sewing, it has beautiful stitches and low labor cost without the needs for skilled operators. Automatic feeding, automatic folding, automatic cutting through hot cutting or cold cutting, automatic sewing and automatic receiving. The sewing range and lace loop width can be customized according to customer needs.

#### Efficiency


Lace loop Width 8~12mm

Lace loop Length 8~12mm

Pitch: 0.05~12.7mm

#### Application

Used in the processing of various footwear, 1~6 lace loop can be sewn at one time.

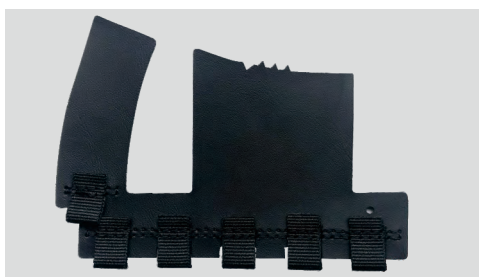

视频及资料下载  
Video and data download

最高缝纫速度 Highest sewing speed	2700rpm	气压 Air pressure	0.5 Mpa 1.8L/min
织带宽度 Webbing width	8-12mm	重量 Weight	200KG
织带长度 Webbing length	14-22mm (对折后)	外型尺寸 Dimensions	1300x1000x1600mm(L*W*H)
织带数量 Number of webbing	1-6根	电压 Voltage	单相 Single phase: 200~240V

以上基础参数表为标准款机型