
单针平缝机型号说明 / Model Description of Single Needle Lockstitch Sewing Machine



双针平缝机型号说明 /Model Description of Double-Needle Lockstitch Sewing Machine

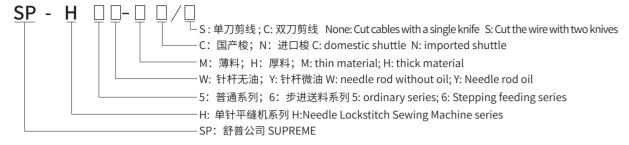

规格 Specification:

SP-842D 双针电脑直驱自动切线平缝机

SP-842DDouble-Needle Computer Direct Drive Automatic Thread Trimmer Lockstitch Machine

SP-872D 双针电脑直驱大旋梭自动切线平缝机

SP-872D Double-NeedleComputer Direct Drive Big Hook Automatic Thread Trimmer Lockstitch Machine

SP-842C 双针直驱平缝机

SP-842C Double-Needle Direct Drive Lockstitch Sewing Machine

SP-872C 双针直驱大旋梭平缝机

SP-872C Double-Needle Direct Drive Large Hook Lockstitch Sewing Machine

SP-845D 双针电脑直驱自动切线角缝平缝机

SP-845D Double-Needle Computer Direct Driver Split Needle Bar Lockstitch Sewing Machine With Automatic Trimmer

SP-875D 双针电脑直驱大旋梭自动切线角缝平缝机


SP-875D Double-Needle Computer Direct Driver Large Rotary Hook Split Needle Bar Lockstitch Sewing Machine With Automatic Trimmer SP-845C 双针直驱角缝平缝机

SP-845C Double-Needle Direct Drive Split Needle Bar Lockstitch Sewing Machine

SP-875C 双针直驱大旋梭角缝平缝机

SP-875C Double-Needle Direct Drive Large Hook Split Needle Bar Lockstitch Sewing Machine

SUPREME 舒普



Ningbo 315100, China

SUPREME INTELLIGENT TECHNOLOGY CO, LTD

地址:宁波市鄞州区金谷北路 219 号

TEL: 0086-574-88393716 88393738 FAX:0086-574-88393717

E-mail:china-supreme@vip.163.com

www.china-supreme.com



大学路大学南郡一号楼门面房 1-35 18858092819 高得正

晋江办事处

福建省晋江市池店镇新店顶街西路 267号 18858088922 洪明艺

苏北办事处 18858085970 彭振庭

苏南办事处 江苏省无锡市锡山区合心路 9-2 号 18858093733 杭义平

东北办事处 15168137390 谢灵龙

18858089061 何路华

北坡经济开发区佳海轻纺城宋岗二路 51-55 号 18171150210 蔡志刚

南昌办事处 ドログラン 江西省南昌市青山湖区昌新路 168号 18858088922 洪明艺



─ 助力时尚产业发展 ─

SP-H5 series

电脑平缝机 Computerized Lockstitch Machine

腔体长度 305mm, 超大操作空间, 西服、棉服、 羽绒服及小模板等缝制面料都能轻松顺畅;

Throat Length is 305mm, providing an extra-large

sewing of fabrics such as suits, cotton garments,

down jackets, and small templates.



性能优势:

H5 系列电脑平缝机为平板式机体,采用计算机控制系统用单直 针刺料、连杆挑线,旋梭勾线,下送料结构;实现自动调速、自 动停止、自动停针位、自动剪线、自动抬压脚、自动计数、自动 倒顺缝、自动加固缝及慢启动等功能。减去倒缝扳手,采用步进 电机驱动倒缝及针距,倒缝无声且线迹完美,针距精度到0.1mm, 锁定针距调节功能,避免随意调节针距;超大的操作空间,缝料 输送更顺畅; 根据服装工艺要求, 选择不同花样线迹缝纫, 且可 自行编辑所需花样,给你时尚美观的线迹;

适用范围:

主要用于薄料针织、内衣、衬衫、制服等,厚料用于各类运动服、 牛仔服、时装、大衣、鞋帽、皮仔、箱包等。

Advantages

The H5 series computerized lockstitch sewing machine features a flatbed design and utilizes a computer control system. It uses a single straight needle for material stitching, with a connecting rod thread take-up and a rotary hook thread loop structure. It incorporates functions such as automatic speed adjustment, automatic stop, automatic needle position stop, automatic thread trimming, automatic thread wiper, automatic stitch counting, automatic foot lift, automatic reinforcement stitching, and slow start. By eliminating the need for a reverse sewing lever, it employs a stepper motor to drive the reverse sewing and stitch length adjustment, resulting in silent and perfectly formed reverse stitches. The stitch length accuracy reaches 0.1mm, and there is a lock function for stitch length adjustment, preventing random changes in stitch length. The machine provides a spacious working area, ensuring smooth fabric feeding. It allows for sewing various decorative patterns and allows users to edit their desired patterns, providing

Application

stylish and aesthetic stitch lines.

The machine is primarily used for thin knitted fabrics, underwear, shirts, uniforms, etc. For thick fabrics, it is suitable for sports apparel, denim garments, fashion garments, coats, footwear, leather goods, luggage, and more.





Stitch length controlled by a stepper motor, with an accuracy of 0.1mm. It features a stitch length lock function, allowing for precise adjustment according to factory requirements and preventing accidental changes.



after the sewing process is completed, resulting in a clean and tidy finish.

双刀剪线机构,线迹美观线头短,不用剪线头,缝纫结束线头在 3.5mm 内; 无 : 单刀剪线 (标配) None: Cut cables with a single knife(standard) S : 双刀剪线 (选配) S: Cut the wire with two knives (optional) Frimming mechanism ensures neat thread trimming and short thread tails. There is no need to manually trim the thread tails. The thread tails are kept within 3.5mm



花样缝纫 Pattern sewing

机针 Needle	DB×1 11#-18#	自动剪线 Automatic Thread Trimming	*
最大针距 (mm) Maximum stitch length	5	自动抬压脚 Automatic Lift of Presser Foot	*
抬压脚高度 (mm) Lifting Height of Presser Foot	5/11	净重 / 毛重 (Kg) Net weight/gross weight	42/50
最高转速 Maximum speed sti/min	5000	包装尺寸 (mm) Package size	730 × 310 × 610
马达 motor	550W		

SP-842D/8720Dseries

双针电脑平缝机 Double-Needle Computerized Lockstitch Machine



电脑直驱款 SP-842D/SP-872D 标配自动剪线、自动倒回缝、自动扫线功能;

Computer direct drive model SP-842D//SP-872D Standard-equipped with Automatic Thread Trimming, Automatic Reverse Stitching, and Automatic fastening stitching Functions. 简易直驱款 SP-842C/SP-872C Simple direct drive SP-842C/SP-872C

性能优势:

电脑双针缝纫机采用计算机控制系统、交流伺服电机直驱,具有 自动调速、停针位、剪线、计针数、倒顺缝、加固缝等功能。

- 1. 驱动轴采用 850W 交流伺服电机直驱形式;
- 2. 针杆和挑线杆采用微油或油脂润滑;
- 3. 具有自动剪线功能、自动扫线功能、自动倒缝功能;
- 4. 机头内部上下轴传动采用同步带机构形式;

适用范围

适应于衬衣、休闲装、茄克衬、牛仔装、羽绒服等,风衣的下摆、棉衣的袋盖、帐篷及汽车内饰等需要双线锁式线迹缝纫。

Advantages

The computer double-needle machine shall adopt computer control system, AC servo motor direct drive, and have the functions of automatic speed regulation, needle stop position, thread trimming, stitching counting, reverse sewing, reinforcement sewing, etc.


- 1. The drive shaft adopts the form of 850W AC servo motor direct drive.
- 2. Needle rod and take-up rod are lubricated with less oil or grease.
- ${\it 3.} \ {\it With automatic thread trimming function, automatic thread sweeping function, automatic reverse sewing function;}$
- 4. The transmission of the upper and lower shafts inside the machine head adopts the synchronous belt mechanism:

Application

It is suitable for shirts, casual wear, jacket lining, denim, down jacket, etc. The hem of windbreaker, pocket flap of cotton coat, tent and car interior, etc.



通过调节挑线杆的线量,对应从薄料到中厚料的缝制。通过最佳的设定,可以对应各种面料。 By adjusting the thread tension of the thread take-up lever, you can achieve stitching results that correspond to various fabric thicknesses, from thin to medium-weight fabrics. By finding the optimal settings, the sewing machine can adapt to different fabric types effectively.



便剪线调整,使用粗线时效果特别明显。 The direct knife thread trimming mechanism offers a fast response speed, making it convenient for adjusting thread trimming when changing needle positions. It is particularly effective when working with thicker threads.



通过在操作盘上简单的数字设定,可以调整缝纫 速度、设定上下停针位,计算己缝制的针数作为 生产计数器使用等各项功能。

You can select different decorative stitch patterns according to the sewing process requirements. Additionally, you have the option to customize and create your own desired stitch patterns. This allows you to sew with stylish and aesthetically pleasing stitch lines, adding an attractive element to your sewing projects.



小油盒密封,避免粉尘线毛进入机腔内,清洁耐久,便捷搬移,不撒油; The small oil reservoir is sealed to prevent the entry of dust, lint, or debris into the machine

The small oil reservoir is sealed to prevent the entry of dust, lint, or debris into the machine chamber. This design ensures cleanliness and durability, making it convenient for transportation without any oil spills.

型号 Model	-403/-405	压脚上升量 Lifting height of prsser foot	7mm
用途 Application	中厚料 / 厚料	马达 Motor	AC 伺服马达 850W
最高缝制速度 Maximum sewing speed	3200rpm/3000rpm/	电源 Power supply	单相 220V
机针 Machine needle	DPx5 #14/DPx5 #22	净重 / 毛重 Net/gross weight(Kg)	52/62
最大针距 Maximum stitch length	4mm/5mm	包装尺寸 Package size	720×310×670mm

C: 国产梭; 无: 进口梭;3: 薄料/中厚料; 5: 厚料; 7: 极厚料; 0: 微油; 3: 无油;4: 倒缝、扫线、切线; D: 电脑直驱; C: 普通直驱;84: 标准旋梭; 87: 大旋梭

SP-845D /875Dseries

双针电脑直驱角缝平缝机 Computerized Double-Needle Drive Split Needle Bar Lockstitch Machine



电脑直驱款 SP-845D/SP-875D 标配自动剪线、自动倒回缝、自动扫线功能;

Computer direct drive model SP-845D//SP-875D Standard-equipped with Automatic Thread Trimming, Automatic Reverse Stitching, and Automatic fastening stitching Functions. 简易直驱款 SP-845C/SP-875C Simple direct drive SP-8425/SP-875C

性能优势:

电脑双针缝纫机采用计算机控制系统、交流伺服电机直驱,具有 自动调速、停针位、剪线、计针数、倒顺缝、加固缝等功能。

1. 驱动轴采用 850W 交流伺服电机直驱形式;

- 2. 针杆和挑线杆采用微油或油脂润滑;
- 3. 具有自动剪线功能、自动扫线功能、自动倒缝功能;
- 4. 机头内部上下轴传动采用同步带机构形式;

活田范围

适应于衬衣、休闲装、茄克衬、牛仔装、羽绒服等,风衣的下摆、棉衣的袋盖、帐篷及汽车内饰等需要双线锁式线迹缝纫。

Auvantages

The computer double-needle machine shall adopt computer control system, AC servo motor direct drive, and have the functions of automatic speed regulation, needle stop position, thread trimming, stitching counting, reverse sewing, reinforcement sewing, etc.

- 1. The drive shaft adopts the form of 850W AC servo motor direct drive.
- 2. Needle rod and take-up rod are lubricated with less oil or grease.
- 3. With automatic thread trimming function, automatic thread sweeping function, automatic reverse sewing function;
- 4. The transmission of the upper and lower shafts inside the machine head adopts the synchronous belt mechanism;

Applica

It is suitable for shirts, casual wear, jacket lining, denim, down jacket, etc. The hem of windbreaker, pocket flap of cotton coat, tent and car interior, etc.



角缝双针机设有停住其中一根针杆运行的装置, 能实现转角缝。

The Angle sewing double needle machine is provided with a device to stop the operation of one of the needle rods, which can realize the Angle sewing.



双直刀剪线机构反应速度快,在更换针位时方便剪线调整,使用粗线时效果特别明显。 The direct knife thread trimming mechanism offers a fast response speed, making it convenient for adjusting thread trimming when changing needle positions. It is particularly effective when working with thicker threads.



通过在操作盘上简单的数字设定,可以调整缝纫 速度、设定上下停针位,计算己缝制的针数作为 生产计数器使用等各项功能。

You can select different decorative stitch patterns according to the sewing process requirements. Additionally, you have the option to customize and create your own desired stitch patterns. This allows you to sew with stylish and aesthetically pleasing stitch lines, adding an attractive element to your sewing projects.



」
小油盒密封,避免粉尘线毛进入机腔内,清洁
耐久,便捷搬移,不撒油;
The small oil reservoir is sealed to prevent the

The small oil reservoir is sealed to prevent the entry of dust, lint, or debris into the machine chamber. This design ensures cleanliness and durability, making it convenient for transportation without any oil spills.

型号 Model	-403/-405/407	压脚上升量 Lifting height of prsser foot	7mm
用途 Application	中厚料 / 厚料 / 极厚料	马达 Motor	AC 伺服马达 850W
最高缝制速度 Maximum sewing speed	3200rpm/3000rpm/3000rpm	电源 Power supply	单相 220V
凡针 Machine needle	DPx5 #14/DPx5 #22	净重 / 毛重 Net/gross weight(Kg)	52/62
最大针距 Maximum stitch length	5mm/7mm	包装尺寸 Package size	720×310×670mm

C: 国产梭; 无: 进口梭;3: 薄料/中厚料; 5: 厚料; 7: 极厚料; 0: 微油; 3: 无油;4: 倒缝、扫线、切线; D: 电脑直驱; C: 普通直驱;84: 标准旋梭;87: 大旋梭