

# SP-FSE5 series

智能超高速电脑包缝机  
Intelligent Super High Speed  
Computer Overlock  
Sewing Machine



实现多项技术革新 ——

低噪音, 高速, 线迹美观, 油量可控的清洁缝纫

Achieve multiple technological innovations


Low noise, high speed, beautiful stitch, clean sewing  
with controllable oil volume



LED 灯五段亮度调节及白光、暖光、白暖双色光可选择, 可以减缓操作人员长时间带来的眼部疲劳;  
The brightness of LED light has 5 degree to adjust, also has white light/warm light/white warm bicolor light to choose. Which can reduce the eye fatigue of operator after sewing with long time.



薄中厚三档可视化调整, 适应布料更宽广, 厚薄通吃;  
The visual adjustment of Three levels (thin, medium, thick) is adapting to wider cloth, thick and thin.

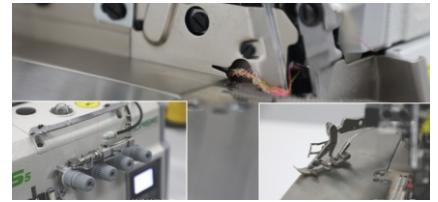

吸风侧吸剪线、针线松线和压脚吹气装置搭配将缝纫结束后的线头控制在 5mm 以内, 免去二次剪线的烦恼;  
Side draught thread trimming, the needle thread loosening device with presser foot air blowing device can be controlled within 5mm after sewing.

## 规格型号: Specifications

机型 Model	用途 Purpose	机针 Needle	针数 Number of stitches	线数 Number of lines	针间距 Needle spacing	针迹宽度 Stitch width	针迹长度 Stitch length	差动比 Differential ratio	压脚高度 Presser foot height	最高转速 Maximum speed	体积 Volume	可搭配辅助装备 Matching accessories
E5-3-03/333	基本缝 Plain seaming	11#	1	3	/	4   -	0.8-4.2	0.7-2.0	5	7000	525×365×510	AT,ATD,KS,KH
E5-4-03/333	基本缝 Plain seaming	11#	2	4	2	4   6	0.8-4.2	0.7-2.0	5.5	7000	525×365×510	AT,ATD,KS,KH
	基本缝 Plain seaming	11#	2	4	2	4   7	0.8-4.2	0.7-2.0				
E5-4-H04/433	厚料 Heavy duty	14#	2	4	2	4   6	0.8-4.6	0.7-2.0	6	6500	525×365×510	AT,ATD,KS,
E5-4-H04/445	厚毛衣 Thick sweater	14#	2	4	2	4   6	0.8-4.6	0.7-2.0	6	6500	525×365×510	AT,ATD,KS,
E5-4-53/333	入带缝 Attaching tape	11#	2	4	2	4   6	0.8-4.0	0.7-2.0	5.5	7000	525×365×510	AT,ATD
E5-4-53/333/PS	毛巾机 Towel making machine	11#	2	4	2	4   6	0.8-4.2	0.7-2.0	5.5	7000	525×365×510	AT,ATD
E5-4-54/433/PS	包边机厚 The edge wrapping machine is thick	16#	2	4	2.6	2.6   5.2	0.8-4.6	0.7-2.0	6	6500	525×365×510	AT,ATD
E5-4-H54/433	厚入带缝 Attaching tape	14#	2	4	2	4   6	0.8-4.6	0.7-2.0	6	6500	525×365×510	AT,ATD
	基本缝 3×4 Plain seaming	14#	2	5	3	4   7	0.8-4.2	0.7-2.0				
E5-5-03/333	基本缝 3×5 Plain seaming	14#	2	5	3	4   8	0.8-4.2	0.7-2.0	5.5	7000	525×365×510	AT,ATD
	基本缝 5×5 Plain seaming	14#	2	5	5	5   10	0.8-4.2	0.7-2.0				
E5-5-53/333-35/PS	口袋包边缝 Pocket edge seam	14#	2	5	3	5   8	0.8-4.6	0.7-2.0	6	6500	525×365×510	AT,ATD
E5-5-53/333-50/TA	包兜机 Lapping machine	14#	2	4	5	-   -	0.8-4.0	0.7-2.0	6	6500	525×365×510	AT,ATD
E5-5-A04/435	牛仔缝 5×5 Denim	18#	2	5	5	5   10	0.8-4.6	0.7-2.0	7	6000	525×365×510	AT,ATD
	牛仔缝 5×6 Denim	18#	2	5	5	5   11	0.8-4.6	0.7-2.0				
E5-6-03/333	基本缝 Plain seaming	11#	3	6	3×2	4   9	0.8-4.2	0.7-2.0	5.5	7000	525×365×510	AT,ATD
	基本缝 Plain seaming	11#	3	6	5×2	4   11	0.8-4.2	0.7-2.0				
E5-6-A04/435	牛仔缝 Denim seam	18#	3	6	5×3	4   12	0.8-4.2	0.7-2.0	7	6000	525×365×510	AT,ATD
E5-6-HA04/435	牛仔缝厚 Denim seam thickness	18#	3	6	5×3	4   12	0.8-4.2	0.7-2.0	7	6000	525×365×510	AT,ATD
E5-6-53/333-324/PS	包边机 Covering machine	11#	3	6	3×2	4   9	0.8-4.0	0.7-2.0	5.5	7000	525×365×510	AT,ATD
E5-6-AS4/435-534/PS	包边机牛仔 Wrapping machine denim	18#	3	6	5×3	4   12	0.8-4.6	0.7-2.0	7	6000	525×365×510	AT,ATD
E5-6-HA54/435-534/PS	包边机牛仔厚 Wrapping machine denim thick	18#	3	6	5×3	4   12	0.8-4.6	0.7-2.0	7	6000	525×365×510	AT,ATD

整机体积: 525X365X510(mm) 整机重量: 32/40(kg), 加装前后气吸装置后整机体积: 525X365X630(mm) 整机重量: 32/43(kg)